




Straight sliding system for wooden doors

CADETTE®

See details of the standard EN 1527 p.4




CAPACITY/DOOR	40 KG
TRACK	GALVANIZED STEEL (2525F) ALUMINIUM (2526F)
MOVEMENT	STRAIGHT

SETS			
Item Nr.		Description	
CADETT185-1	STEEL	Set including: - 1 gear CADETT - 1 track 2525F/185	10
CAD185A-1	ALUMINIUM	Set including: - 1 gear CADETT - 1 track 2526F/185 (aluminium - 1.85 m) - 1 Buly (spirit level)	8

TRACKS			
2525F/155	STEEL	Galvanized track, 27 x 24.5 mm, drilled and countersunk every 110 mm in length of 1.55 m.	4
2525F/185		Ditto in length of 1.85 m.	4
2525F/400		Ditto in length of 4 m.	4
2525F/500		Ditto in length of 5 m.	4
2525F/600		Ditto in length of 6 m.	4
2526F/185	ALU	Raw aluminium track, 26 x 25 mm, drilled and countersunk every 110 mm in length of 1.85 m.	4

GEAR			
CADETT		Gear including: - 2 rollers 0222 supplied with 2 plates 0026 and 0021 - 2 end stops 1097 - 1 guide 1103 - Screws, spanner and mounting instructions	10

ROLLERS & ACCESSORIES			
0222	CADETTE roller mounted on a RILSAN ring, supplied with plates 0026 and 0021	10	
0021	Side fixing plate with tapped hole Ø M8 Height: 40 mm - width: 40 mm For panels over 18 mm thickness	10	
0026	Top fixing plate with tapped hole Ø M8 Length: 75 mm - width: 20 mm For panels over 20 mm thickness	10	
0023	Ditto width of 15 mm instead 20 mm. For panels of 16 mm and 19 mm thickness	10	
0022	Mortising plate for roller fixing.	10	
1097	End stop for track 2525 .	10	
1103	Polyamide guide - Screwing type for channel of 6x18 mm.	10	
2528	Wall fixing bracket for track 2525 supplied with screws, nuts and washers. Height: 17 mm - Length: 22 mm - Thickness: 20/10°	25	
2529	Wall fixing bracket for track 2525 supplied with screws, nuts and washers. Height: 23 mm - Length: 30 mm - Thickness: 30/10°	25	
2529-5	Ditto in set of 5		
2528D	Wall-fixing bracket for twinned tracks 2525 supplied with screws, nuts and washers. Height: 34 mm - Length: 47 mm - Thickness: 30/10°	10	




40 Kg

Sliding system with adjustable rollers, for indoor or outdoor use.


- The pendant bolt can be swivelled in any direction. This enables quick mounting and adjustment at any time
- Silent and smooth running thanks to a nylon roller mounted on a self-lubricating ring.
- Can be mounted with single or double tracks



CADETTE®




Track 2525F - STEEL
(1.55 - 1.85 - 4 - 5 - 6 m)




Track 2526F - ALUMINIUM
(1.85 m)



pendant bolt

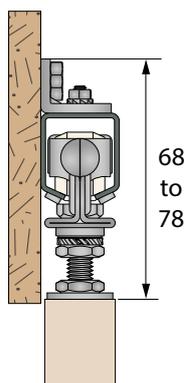

Bracket 2528
for panels
up to 20 mm

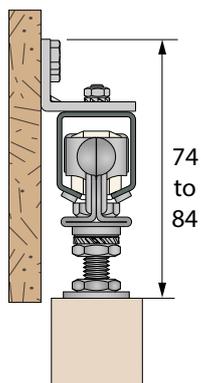

Bracket 2529
for panels
from 25 to 40 mm

CADETTE®

