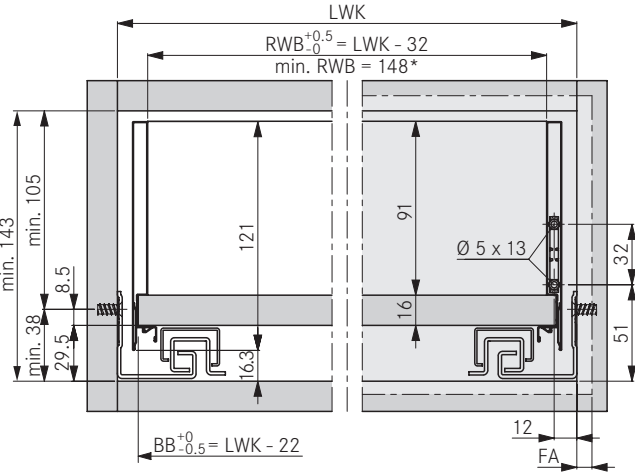

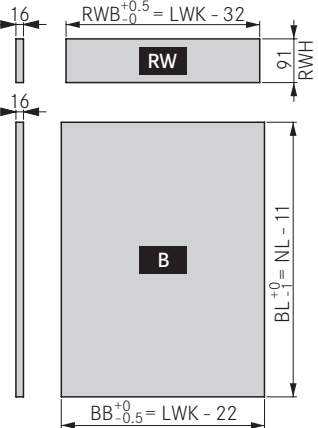
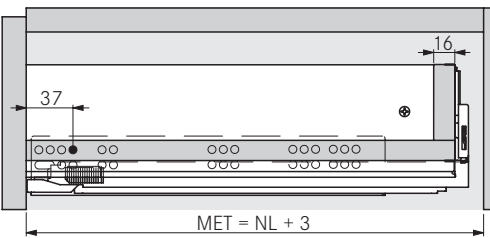
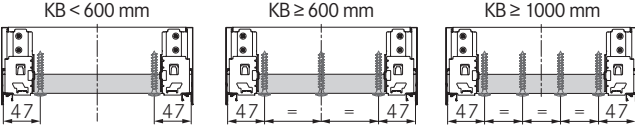
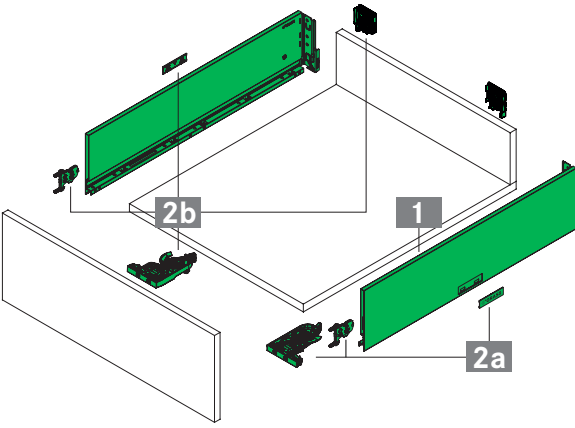
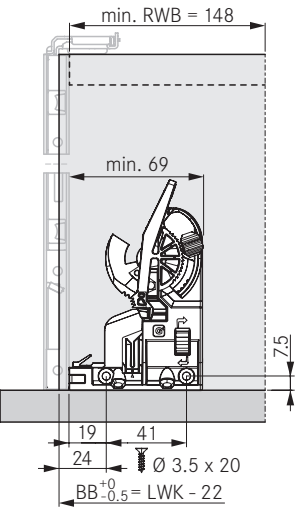
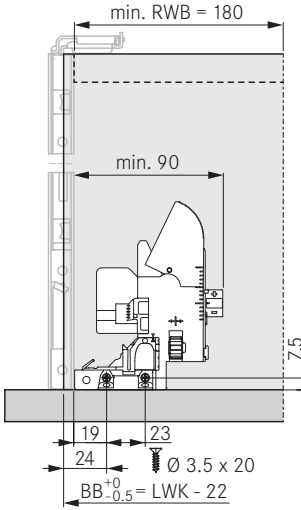


PLANNING INFORMATION

All dimensions in millimetres

Front panel installation dimensions	Installation dimensions for back panel	Chipboard cutting dimensions
 LWK $RWB^{+0.5}_{-0} = LWK - 32$ min. $RWB = 148^*$ min. 143 min. 105 min. 38 8.5 29.5 121 16.3 $BB^{+0}_{-0.5} = LWK - 22$ 12 FA Ø 5 x 13 32 51	 16 12 Ø 3.5 x 15 48 34 91 16	 $RWB^{+0.5}_{-0} = LWK - 32$ RW 91 RW H BL⁺₋⁰ = NL - 11 B $BB^{+0}_{-0.5} = LWK - 22$
* Zamak front locking device: 180 mm		
Minimum installation depth	Back panel screw joint	
 37 MET = NL + 3	 KB < 600 mm KB ≥ 600 mm KB ≥ 1000 mm	
Exploded Drawing	Mounting position for front locking device (plastic/Zamak)	
 2b 1 2a	 min. $RWB = 148$ min. 69 19 41 24 Ø 3.5 x 20 $BB^{+0}_{-0.5} = LWK - 22$ 7.5	 min. $RWB = 180$ min. 90 19 23 24 Ø 3.5 x 20 $BB^{+0}_{-0.5} = LWK - 22$ 7.5

LEGEND

B	Bottom panel	KB	Cabinet width	RW	Back panel
BB	Bottom panel width	LWK	Inside cabinet width	RWB	Back panel width
BL	Bottom panel length	MET	Minimum installation depth	RWH	Back panel height
FA	Front overlay	NL	Nominal length		

All dimensions in millimetres. Subject to changes.