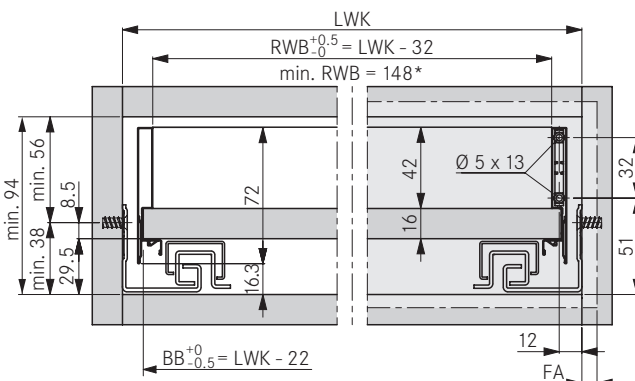

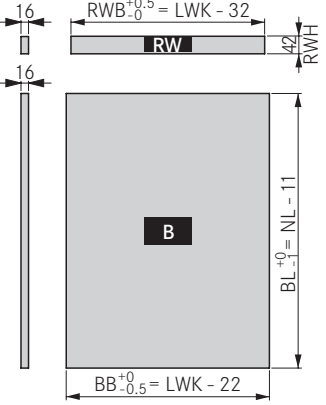
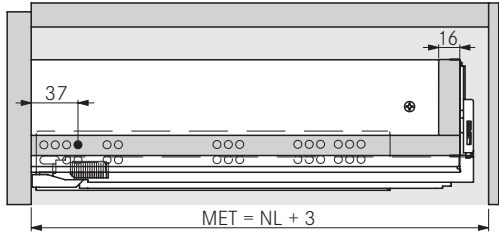
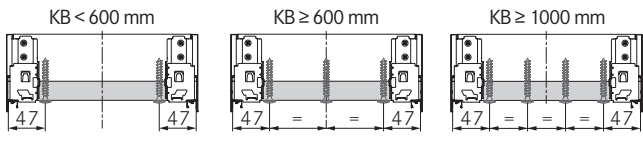
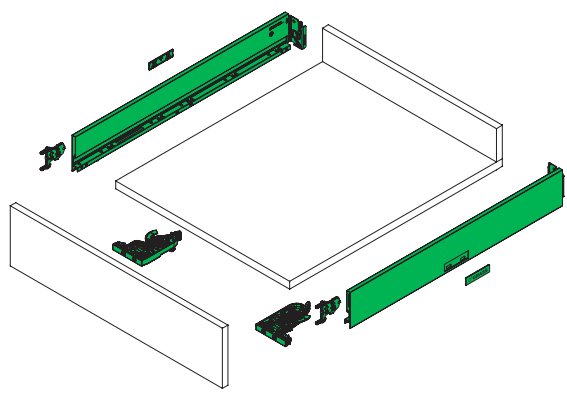
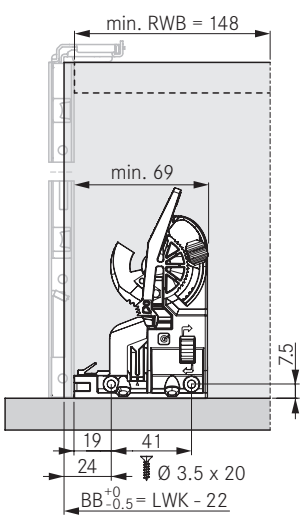
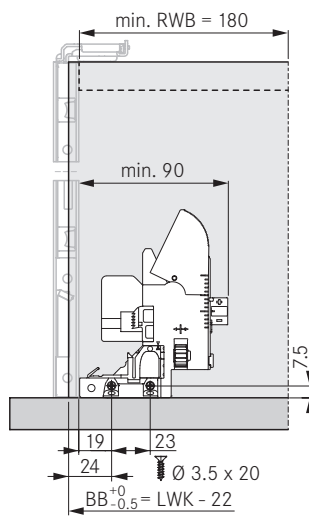


PLANNING INFORMATION

All dimensions in millimetres

Front panel installation dimensions	Installation dimensions for back panel	Chipboard cutting dimensions
 LWK $RWB_{-0}^{+0.5} = LWK - 32$ min. RWB = 148* min. 94 min. 38 min. 8.5 72 16.3 $BB_{-0.5}^{+0} = LWK - 22$ 12 FA 42 16 51 32	 16 12 34 42 16 Ø 3.5 x 15	 $RWB_{-0}^{+0.5} = LWK - 32$ RW 42 RWH B $BL_{-1}^{+0} = NL - 11$ $BB_{-0.5}^{+0} = LWK - 22$
* Zamak front locking device: 180 mm		
Minimum installation depth	Back panel screw joint	
 37 16 MET = NL + 3	 KB < 600 mm KB ≥ 600 mm KB ≥ 1000 mm 47 47 47 47 47 47	
Exploded Drawing	Mounting position for front locking device (plastic/Zamak)	
	 min. RWB = 148 min. 69 19 41 24 Ø 3.5 x 20 $BB_{-0.5}^{+0} = LWK - 22$ 7.5	 min. RWB = 180 min. 90 19 23 24 Ø 3.5 x 20 $BB_{-0.5}^{+0} = LWK - 22$ 7.5

LEGEND

B	Bottom panel
BB	Bottom panel width
BL	Bottom panel length
FA	Front overlay

KB	Cabinet width
LWK	Inside cabinet width
MET	Minimum installation depth
NL	Nominal length

RW	Back panel
RWB	Back panel width
RWH	Back panel height